

071306T4 EEN

ELECTRICAL ENGINEERING (POWER OPTION) LEVEL 6

ENG/OS/PO/CR/02/6

INSTALL ELECTRICAL POWER LINES

March/April 2024

Time: 5 Hours



**TVET CURRICULUM DEVELOPMENT, ASSESSMENT AND CERTIFICATION
COUNCIL (TVET CDACC)**

PRACTICAL ASSESSMENT

5 HOURS

INSTRUCTIONS TO CANDIDATE

- i. *Do not write on the question paper*
- ii. *DO NOT switch ON power without assessor's permission*
- iii. *A separate plain paper will be provided*
- iv. *Return the question paper to the assessor at the end of practical.*

This paper consists of THREE printed pages.

Candidate should check the question paper to ascertain that all the pages are printed as indicated and that no questions are missing.

You are provided with the following resources to perform given tasks:

S/No	Item description	Quantity	Unit of Measure
1.	Insulator shackle LV	10	Pcs
2	L.V Stay insulator	2	Pcs
3	Conductor 50mm ² AA HD Bare	250	m
4	Stay block ½ “ concrete	2	Pcs
5	L.V shackle strap	10	Pcs
6	Bolt and Nuts (4 ½ “x 5/8 “)	10	Pcs
7	Bolt and Nuts (9” x 5/8”)	2	Pcs
8	Eye bolt and Nut M20 × 300(¾ x 14”) H.D Ga	1	Pcs
9	D-iron	8	Pcs
10	PME plate	1	Pcs
11	Copper earth rod 5”x ½ ” c/w clamp	2	Pcs
12	Connector Line Tap 50mm ² (AL)	4	Pcs
13	Denso Tape	1	Pcs
14	Search rope	15	m
15	Wood pole 10m	2	Pcs

Figure 1, shows a layout of single-phase distribution system. The poles are pre-mounted.

Carryout the following tasks;

- TASK 1:** String the two spans
- TASK 2:** Earth the installation at the correct point
- TASK 3:** Support the end post with stay wire;
- TASK 4:** Perform tests on the installed system for functionality.

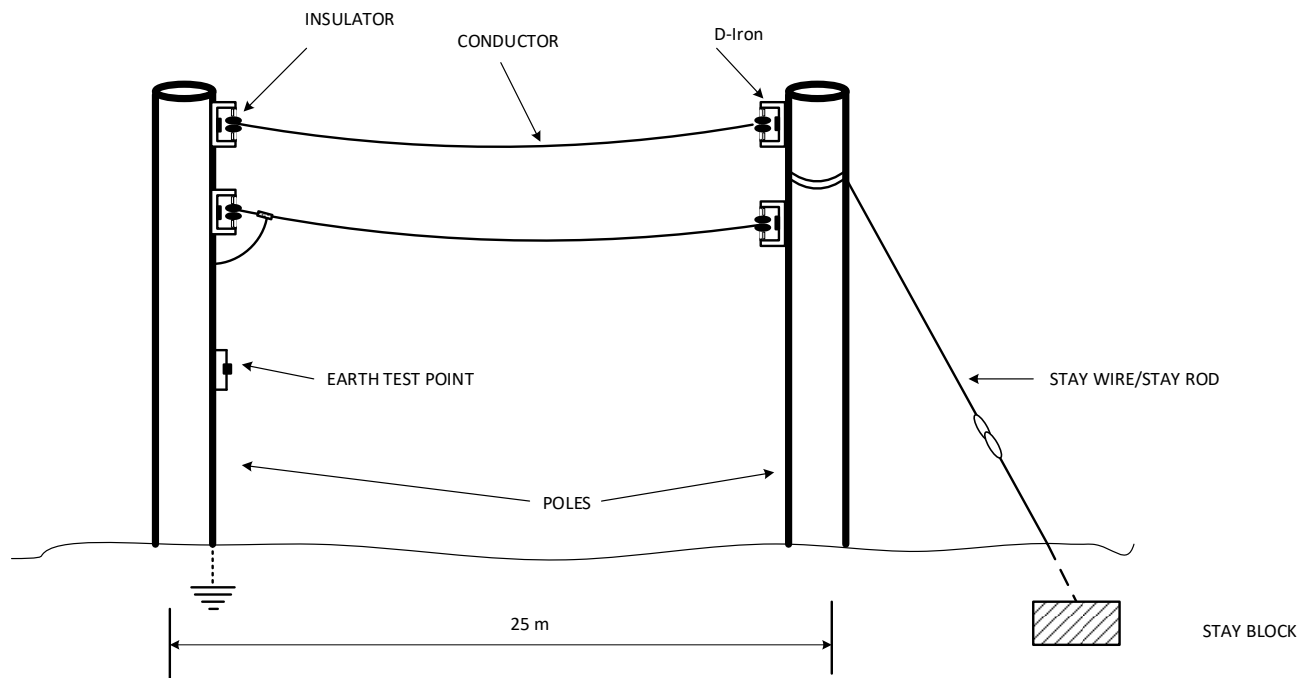


Figure 1

THIS IS THE LAST PRINTED PAGE